


BICYCLE DELIVERY BASKET

Now fits 7/8", 1" & 1-1/4" Dia. Bars and comes with metric fasteners

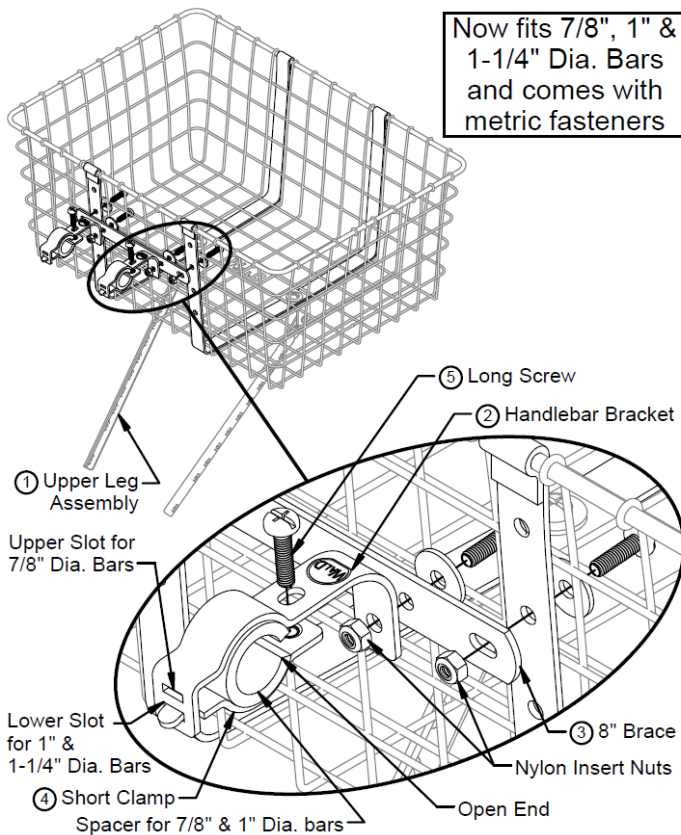

Assembly Instructions :

IMPORTANT :

- Flat washers must be used under all **SHORT** Larger Diameter screw heads.
- Use wrench & screwdriver to fully tighten all nuts & screws

1. Fasten ① upper leg assembly to basket with larger diameter short screws (use flat washer under screw head).
2. ② Handlebar brackets are mounted to center holes on ③ 8" brace with larger diameter short screws (use flat washer under screw head).
3. Attach ③ 8" brace to bands on basket with larger diameter short screws (use flat washer under screw head).
Note : Use top holes for 26" bike.
4. Fasten basket to handlebar with ④ short clamps using ⑤ larger diameter long screws (Flat washers not required).
 - If mounting to a 7/8" handlebar use upper slot on ② handlebar bracket and if to a 1" or 1-1/4" handlebar, use lower slot.
 - If clamping onto a 7/8" or 1" portion of handlebar, insert rubber spacer as shown with open end towards screw.

-- INSTRUCTIONS CONTINUED ON BACK --



Proudly made in the U.S.A.



Mfgr. No. 157B
© WALD LLC 2013
REV.E 1/3/2013




WARNING : This product contains a chemical known to the State of California to cause cancer.

5. Adjust legs to the required length with the upper leg to the outside & connect upper & lower legs together with 5/8" long smaller diameter screws & hex nuts (as shown).
Note : Use end hole of each leg section & align with adjusting hole in mating leg section. Insert screw through outside of leg with nuts on inside.

6. When mounting basket legs to axle, install one leg at a time.
 - A. Remove axle nut from one side of wheel.
 - B. Place axle mounting hole (larger hole) on axle.
 - C. Replace axle nut & tighten.
 - D. Repeat steps 6A thru 6C for other side.

E. Be sure wheel is aligned properly in fork. If not, loosen axle nut(s), readjust & tighten.
Note : If bicycle has a quick-release front hub see your bicycle dealer for attachment screws & proper mounting.

7. Once legs are installed, position handlebar clamps so that the bottom of the basket does not rub tire or fender. Top of basket should be fairly level.
8. Fully tighten all screws & nuts.
Failure to tighten basket screws & nuts, leg section screws & nuts or wheel axle nuts, failure to have wheel quick-release mechanism properly adjusted, could result in loss of control & possible injury. Please consult a bicycle dealer or your bicycle owner's manual for applicable tightening/adjusting requirements.
Note : Periodically check that all fasteners are tight.

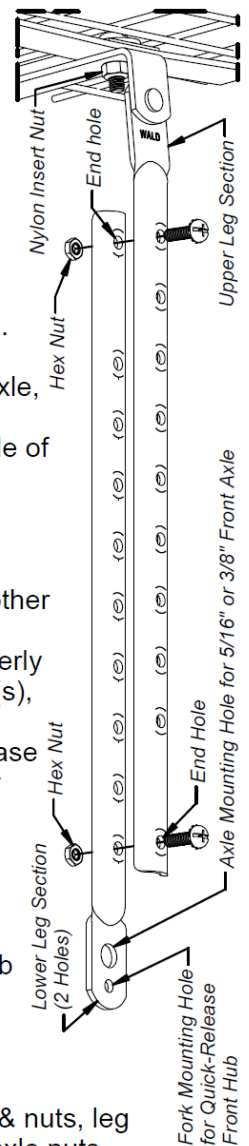

!WARNING!

- **DO NOT** overload basket.
Overloading basket may cause difficulty in steering and/or loss of bicycle control which could result in injury.
- **DO NOT** bend legs or leg mounting tabs.
- **DO NOT** mount legs to the inside of the bicycle's front fork blades. Mount only to the outside of the bicycle's front fork blades.
- **DO NOT** assemble a quick-release front hub through leg holes. The legs are to be mounted to bolt on front axles or to fork eyelets.
- **DO NOT** use on bicycles with a carbon fiber front fork or handlebar.
- **DO NOT** use on bicycles with a front suspension or springer fork.