



MULTI-FIT FRONT BASKET

- Fits 7/8", 1" & 1-1/4" Diameter Bars
- Comes with metric fasteners
- 2-Piece adjustable legs

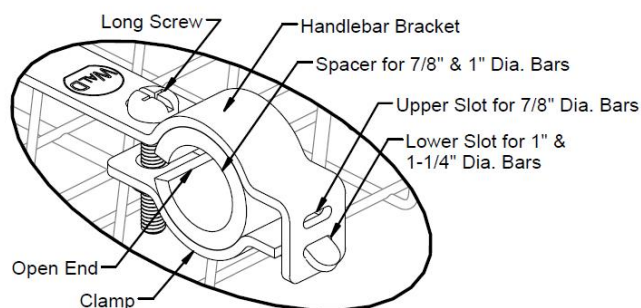

VIEW A

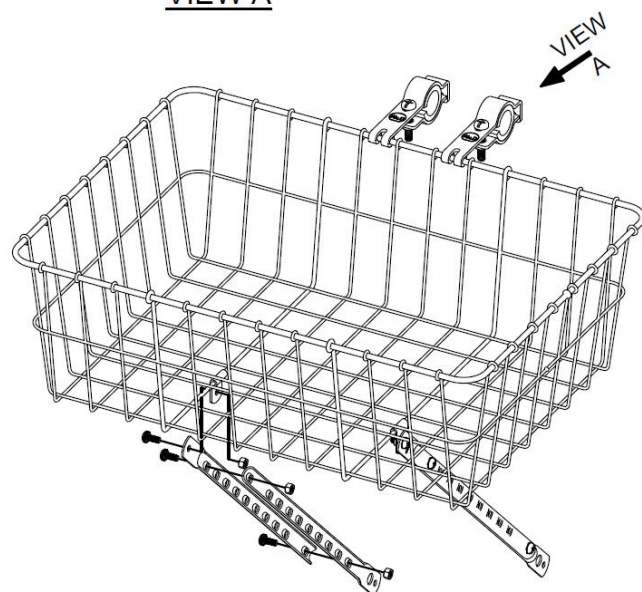

Patent
D722003

ASSEMBLY
INSTRUCTIONS
ON BACK



WARNING : This product contains a chemical known to the state of California to cause cancer.



Proudly Made in the U.S.A.

Mfgr.No.1392 (Zinc)
©2015 Wald LLC
Rev.C, 2/27/2015



0 46307 13920 3

Assembly Instructions :

IMPORTANT :

- Use wrench & screwdriver to fully tighten all nuts & screws

1. Fasten basket to handlebar with clamps using larger diameter long screws. Loosely tighten.
 - If mounting to a 7/8" handlebar use the upper slot on the handlebar bracket and if to a 1" or 1-1/4" handlebar, use the lower slot.
 - If clamping onto 7/8" or 1" portion of handlebar, insert rubber spacer as shown in View A with open end towards screw.
2. Attach top leg sections (marked "WALD") to leg mounting brackets on bottom of basket with small diameter screws & hex nuts. Loosely tighten.
3. Adjust legs to the required length so top of basket is fairly level. Put the top leg to the outside & connect top & bottom legs together with smaller diameter screws & hex nuts (as shown).

Note: Use end hole of each leg section & align with adjusting hole in mating leg section. Insert screws through outside of leg with nuts on inside.
4. When mounting basket legs to axle, install one leg at a time.
 - A. Remove axle nut from one side of wheel.
 - B. Place axle mounting hole (larger hole) on axle.
 - C. Replace axle nut & tighten.
 - D. Repeat steps 4A thru 4C for other side.
 - E. Be sure wheel is aligned properly in fork. If not, loosen axle nut(s), re-adjust & tighten.

Note: If bicycle has a quick-release front hub, see your bicycle dealer for attachment screws & proper mounting.
5. Once legs are installed, adjust handlebar brackets so that basket does not rub tire or fender. Top of basket should be fairly level.
6. Completely tighten all screws & nuts.

The following could result in loss of control & possible injury : failure to tighten basket screws & nuts, leg section screws & nuts, wheel axle nuts or failure to have wheel quick-release mechanism properly adjusted.

Please consult a bicycle dealer or your bicycle owner's manual for applicable tightening/adjusting requirements.

!WARNING!

- **DO NOT** overload basket. Overloading basket or not securing item(s) in basket may cause difficulty in steering and/or loss of bicycle control which could result in injury.
- **DO NOT** bend legs or leg mounting tabs.
- **DO NOT** mount legs to inside of the bicycle's front fork blades. Mount only to the outside of the bicycle's front fork blades.
- **DO NOT** assemble a quick-release front hub through leg holes. The legs are to be mounted to bolt on front axles or to fork eyelets.
- **DO NOT** use on bicycles with carbon fiber front fork or handlebar.
- **DO NOT** use on bicycles with a front suspension or springer fork.

