


ADJUSTABLE BASKET LEGS

FOR MOST FRONT BASKETS
WITH LEG MOUNTING BRACKETS & MOST
BICYCLES WITH 700c, 26", 24" & 20" WHEELS



ASSEMBLY
INSTRUCTIONS
ON BACK

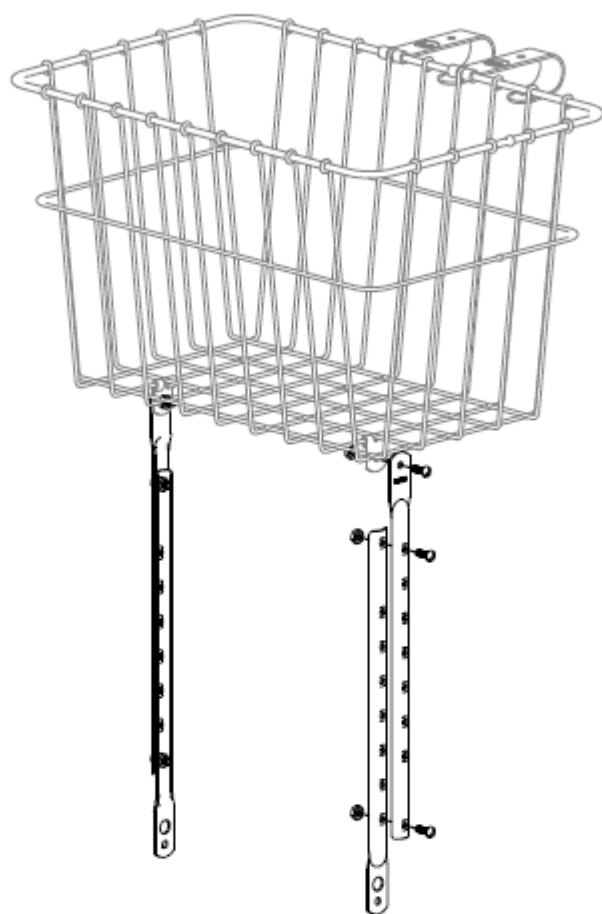

Proudly Made in the U.S.A.

Mfg.No.198GBX (Black)
© 2013 Wald LLC
Rev.B, 1/3/2013



WARNING : This product contains a chemical known to the state of California to cause cancer.

ASSEMBLY INSTRUCTIONS

1. Attach top leg section (marked "WALD") to leg mounting brackets on bottom of basket with 1/2" long **Small Diameter** screws & hex nuts. Loosely tighten.


2. Adjust legs to required length with top leg section to the outside & connect top & bottom leg sections together with 1/2" long **Large Diameter** screws & hex nuts (as shown).
Note : Use end hole of each leg section & align with adjusting hole in mating leg section. Insert screw through outside of leg with nuts on the inside.

3. When mounting basket legs to axle, install one leg at a time.
A. Remove axle nut from one side of wheel.
B. Place axle mounting hole (larger hole) on axle.
C. Replace axle nut & tighten.
D. Repeat steps 3A thru 3C for other side.
E. Be sure wheel is aligned properly in fork. If not, loosen axle nut(s), readjust & tighten.

Note : If bicycle has a quick-release front hub see your bicycle dealer for attachment screws & proper mounting.

4. Once legs are installed, position basket so that the bottom of the basket does not rub tire or fender. Top of basket should be fairly level.

5. Completely and periodically tighten all screws & nuts. Failure to tighten basket screws & nuts, leg section screws & nuts or wheel axle nuts, failure to have wheel quick-release mechanism properly adjusted, could result in loss of control & possible injury. Please consult a bicycle dealer or your bicycle owner's manual for applicable tightening/adjusting requirements.

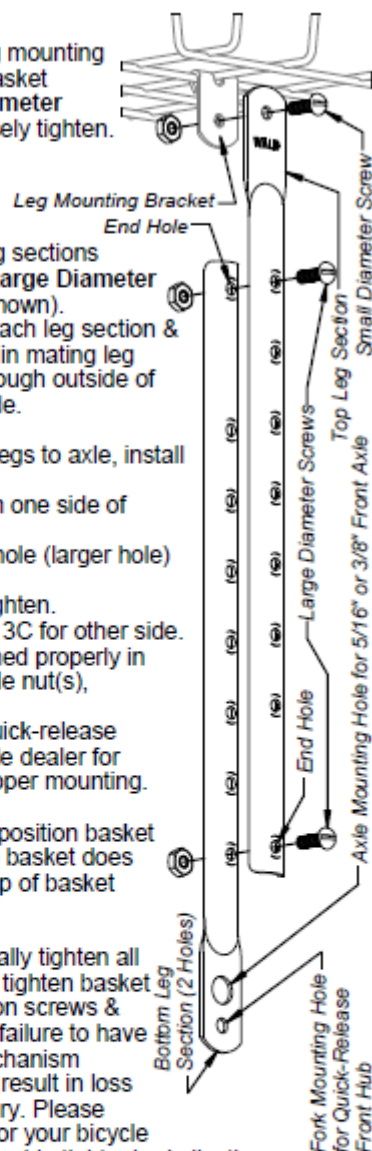

WARNING!

- **NOT FOR USE** on large delivery or other heavy duty style baskets
- **DO NOT** overload basket. Overloading basket may cause difficulty in steering and/or loss of bicycle control which could result in injury.
- **DO NOT** bend legs or leg mounting tabs.
- **DO NOT** mount legs to the inside of the bicycle's front fork blades. Mount only to the outside of the bicycle's front fork blades.
- **DO NOT** assemble a quick-release front hub through leg holes. The legs are to be mounted to bolt on front axles or to fork eyelets.
- **DO NOT** use on bicycles with a carbon fiber front fork or handlebar.
- **DO NOT** use on bicycles with a front suspension or springer fork.